

SWATYCOMET CBN-V SPECIAL



Vitrified bonded
CBN abrasives
for grinding
the most complex
tool parts!



SWATYCOMET


NEW PRODUCTS
MANUFACTURED BY
S P E 2

SWATYCOMET CBN-V

SPECIAL



Advantages:

- Reduced machining costs.
- Effective grinding of the most difficult materials for tool production.
- Minimal number of dressing strokes.
- Shorter grinding times.
- Lower grinding forces.

Applications:

- Grinding of high alloy tool parts (for machining plastics, sheet metal and styrofoam, and thermoforming), with hardnesses of up to 70 HRC.
- OCR12 VM
- Titanium alloys
- K340
- V2000
- V10
- M330




Example:

Grinding type: **External cylindrical**

Grinding wheel dimensions: **400 x 25 x 6 x 127**

Grinding wheel composition: **B126 M6V3 C100**

Machined material: **Vanadis 10 SC**

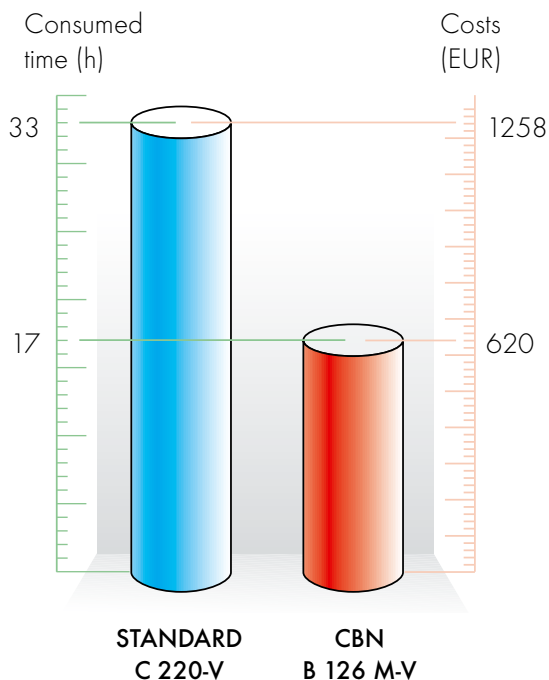

The comparative calculation was done for 100 units.

Recommendations:

- Internal grinding: **B126 J7V1 C100**
- External grinding: **B126 M6V3 C100**
- Flat grinding: **B126 M6V3 C100**
- Coordinate grinding: **B126 K6V1 C100**

Dimensions:

- Continuous type for diameters from 3 mm to 500 mm.
- Segmental type without diameter limitations.



SWATYCOMET



SWATYCOMET, umetni brusi in nekovine, d.o.o.
 Titova cesta 60, 2000 Maribor, Slovenija
 t: +386 (0)2 3331 600, (0)3 7575 000
 f: +386 (0)2 3331 790, (0)3 7575 100
 www.swatycomet.si, e: info@swatycomet.si